


DESCRIPTION

Encapsulated coil incorporating the magnetic circuit.
Fixing by means of a central nut.
Electrical connection according to DIN 43650 A
(A EN 175301-803 ISO 4400)

CONSTRUCTION

Encapsulation:
Class F Fibre-glass Nylon
Class H Fibre-glass Polyarylamide
Magnetic circuit Zinc-plated steel
Windings Copper covered with class H insulation

OPTIONS: Electrical connection through cable
Special powers and voltages
Self-extinguish

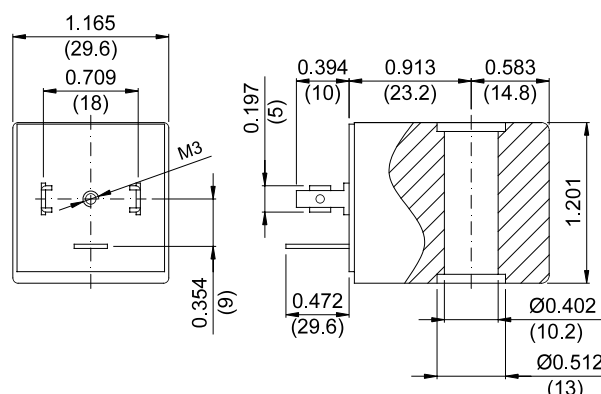

6

CODE		Alternating Current Voltage	Direct Current Voltage	Power ①		Voltage tolerance		Connector	Service ED
Class F insulation	Class H insulation			Alternating Current (VA)	Direct Current (W)	Alternating current	Direct current		
40A	42A	12V 50/60Hz	-	11	-	+15% -10%	-	10349000	100%
40B	42B	24V 50/60Hz	-						
40C	42C	48V 50/60Hz	-						
40D	42D	110V 50/60Hz	-						
40E	42E	220/230V 50/60Hz	-						
40F	42F	240V 50/60Hz	-						
40G	42G	380V 50/60Hz	-	-	5	-	±10%	10349000	100%
400	420	-	12						
401	421	-	24						
402	422	-	48						

Certified version **CALUS**

-	U450	-	12	-	8	-	±10%	10349000	100%
-	U451	-	24						

① Considering nominal voltage and an ambient temperature of +68°F (+20°C)